

DAV MODEL SCHOOL, CFRI, DHANBAD
DAV CMC, New Delhi, E-mail: davcfri@gmail.com

TENDER NOTICE

Date: 20.06.2026

Sealed Quotations are invited for the renovation and conversion of a room into Men's and Women's toilets Near the Fee Counter and Gate No. 03 of the school campus.

- ❖ **Work Required:** Converting a room into toilets (Men's & Women's).
- ❖ **Location:** Near the Fee Counter and Gate No. 03 of the school campus.
- ❖ **Specifications:** Detailed work requirements and layouts are provided in the attached Bill of Quantities (BOQ) and drawings.
- ❖ Sealed quotations should be sent **by Speed Post, Registered Post, or by Hand** to the office of the undersigned
- ❖ Last date of submission: 05/07/2026
- ❖ For any clarification, please contact the school office between **9:00 AM to 2:00 PM.**
- ❖ Rules & Regulations applicable and approved by DAV CMC will be followed

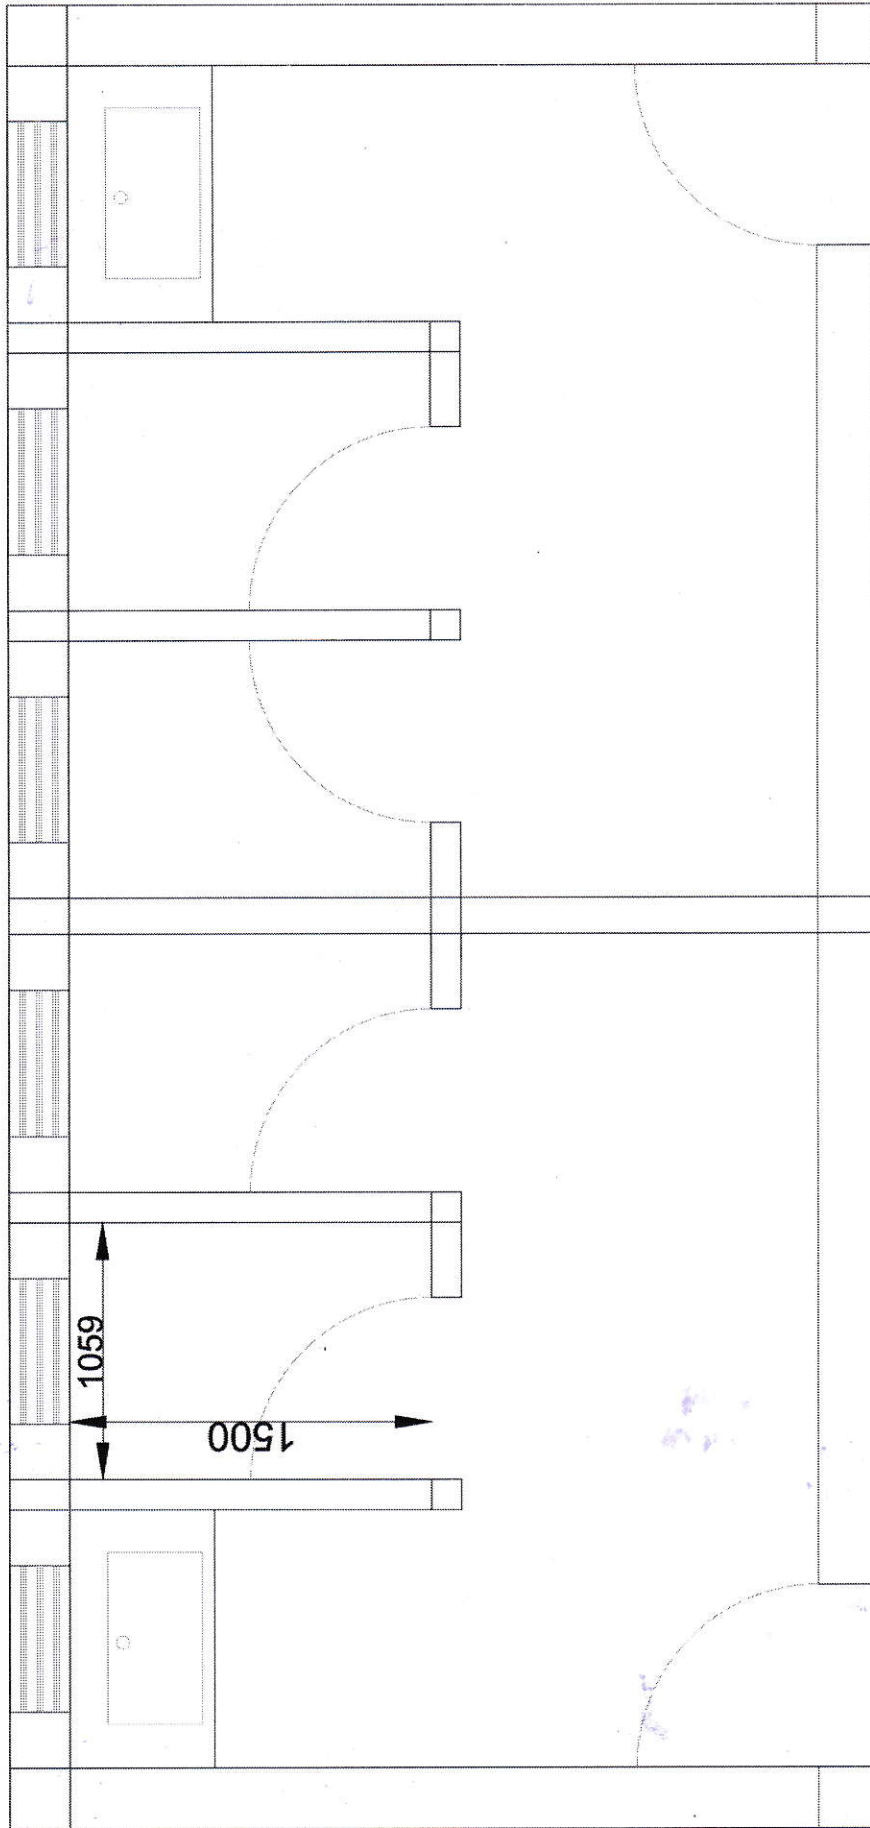

PRINCIPAL
PRINCIPAL
DAV MODEL SCHOOL
CFRI, DHANBAD
20.6.2026

**Bill of Quantities (BOQ): Repair and Maintenance/Convert Room into Toilet
at DAV MODEL SCHOOL ,CFRI, DHANBAD**

SN	Details of item	Unit	Quantity
1	Demolishing brick work manually / by mechanical means including stacking etc. complete	Cum	3.330
2	Opening of old existing AC sheet and fixing the same after necessary heightening etc. complete	Sqm	54.00
3	Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal etc. complete	Sqm	47.00
4	Brick work in superstructure (1:6) cement mortar etc. complete	Cum	9.38
5	Providing and fixing Ac sheet of existing shape and size etc. complete	Sqm	5.00
6	Providing and fixing 1st quality ceramic glazed wall tiles(300x450mm) with cement mortar etc. complete	Sqm	75.00
7	Providing and laying Ceramic anti skid floor tiles of size 300x300 mm with cement mortar etc. complete	Sqm	54.00
8	Applying priming coats with primer of approved brand and manufacture, having low VOC (Volatile Organic Compound) clean the surface before priming etc. complete	Sqm	65.00
9	Distempering with 1st quality acrylic distemper (Ready mix) having VOC contents less than 50 grams/litre of one and more coat etc. complete	Sqm	65.00
10	Providing and fixing false ceiling tile (595x595) mm including aluminium channel etc. complete	Sqm	54.00
11	Providing and fixing water closet squatting pan (Indian type W.C. pan) with complete pipes including tap and hand faucet along with necessary plumbing etc. complete	Each	4
12	Fixing counter to wash basing including all fittings and fixtures etc. complete	Each	2
13	Providing necessary 30 mm thick factory made Polyvinyl Chloride (PVC) door shutter made of styles and rails of a uPVC hollow section of size 60x30 mm and wall thickness 2 mm (± 0.2 mm), with inbuilt decorative moulding edging on one side.	Sqm	6.30
14	Providing and fixing 1mm thick M.S. sheet door with frame of 40x40x6 mm angle iron and 3 mm M.S. gusset plates at the junctions and corners, all necessary fittings complete	Kg	98

Amit Rajan
Amit Rajan
Architech, Engineer
Regd No 14301/91

7500



3600

Architect Engineer
Amit Rajaram
Regd No.-1430191
Amit Rajaram